



Manufacturer address	Möller Metalldichtungen GmbH, Brunnenweg 10, 39444 Hecklingen, DE	According to DIN EN 13555 2014-7
Product name	MMK(Z) (kammprofile gasket with graphite layers)	
Product dimensions	69 x 53 x 4.8 mm (DIN EN 1514-6 2004-3)	

Minimum stress to seal $Q_{min(L)}$ (at assembly), $Q_{smin(L)}$ (after off-loading) for $p = 40$ bar ($T = 23 \pm 2$ °C)										
L [mg/(s·m)]	$Q_{min(L)}$ [MPa]	$Q_{smin(L)}$ [MPa]								
		$Q_A = 9.6$ [MPa]	$Q_A = 19$ [MPa]	$Q_A = 39$ [MPa]	$Q_A = 59$ [MPa]	$Q_A = 79$ [MPa]	$Q_A = 99$ [MPa]	$Q_A = 119$ [MPa]	$Q_A = 139$ [MPa]	$Q_A = 159$ [MPa]
1E-0	10		10	10	10	10	10			10
1E-1	10		10	10	10	10	10			10
1E-2	14		10	10	10	10	10			10
1E-3	23			14	13	12	10			10
1E-4	49				34	32	31			25
1E-5	94						91			58
1E-6	144									129
1E-7										
1E-8										

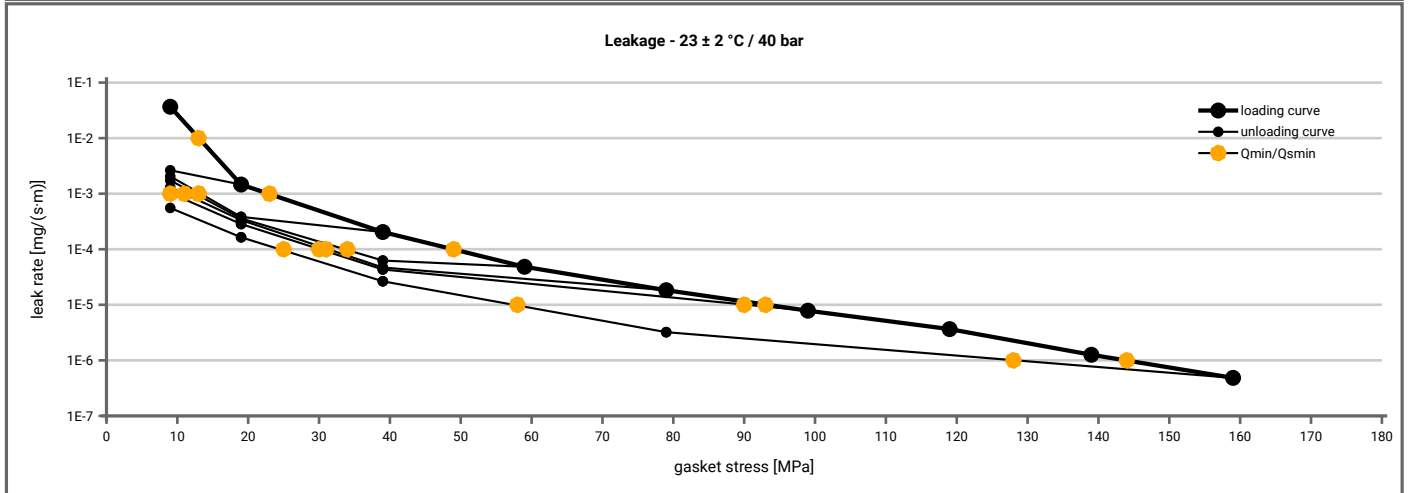

Manufacturer address	Möller Metalldichtungen GmbH, Brunnenweg 10, 39444 Hecklingen, DE	According to DIN EN 13555 2014-7
Product name	MMK(Z) (kammprofile gasket with graphite layers)	
Product dimensions	69 x 53 x 4.8 mm (DIN EN 1514-6 2004-3)	

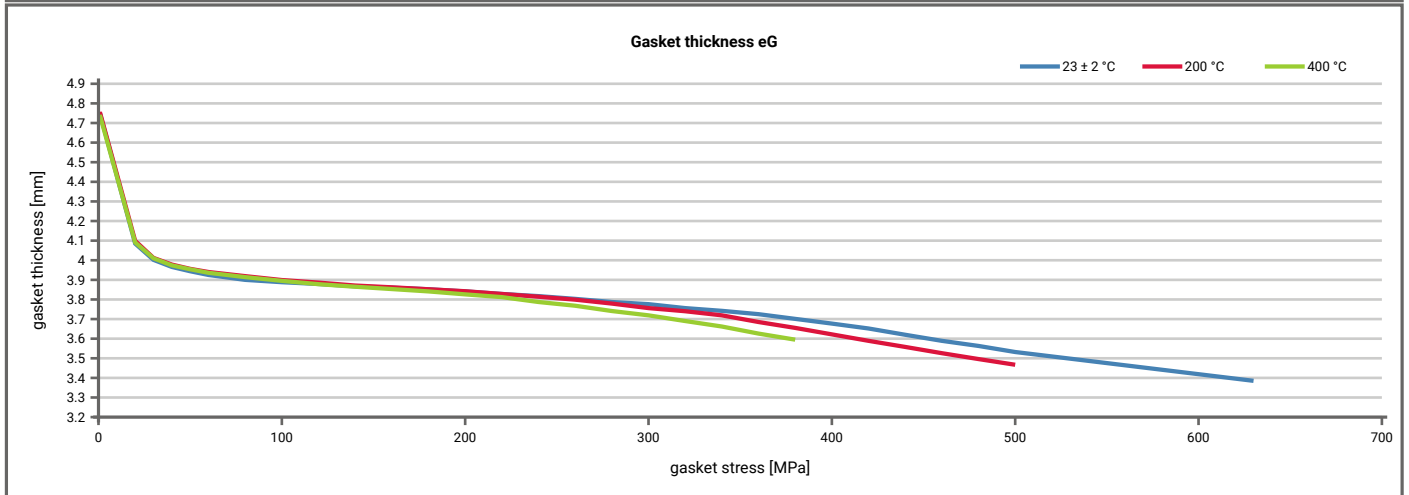

Note: the content of darkened cells was not determined respectively is unnecessary	Rev.-No.: 2	Creation date of this sheet: 2018-06-08
--	-------------	---