


Company Address	C.S.U.T. SPETECH Sp. z o.o., ul. Szyprow 17, 43-382 Bielsko-Biala, Poland
Gasket Type	Spetospir SWZ Graphite
Sealing element dimensions [mm]	72 x 56 x 4,8

L [mg/(s*m)]	Q <sub>min/L</sub> [MPa]	Minimum stress to seal Q <sub>min/L</sub> (at assembly), Q <sub>Smin/L</sub> (after off-loading) for p = 40 bar								
		Q <sub>Smin/L</sub> [MPa]								
		Q <sub>A</sub> = 20 MPa	Q <sub>A</sub> = 40 MPa	Q <sub>A</sub> = 60 MPa	Q <sub>A</sub> = 80 MPa	Q <sub>A</sub> = 100 MPa	Q <sub>A</sub> = 120 MPa	Q <sub>A</sub> = 140 MPa	Q <sub>A</sub> = 160 MPa	
10 <sup>0</sup>	10	10	10	10	10	10			10	
10 <sup>-1</sup>	10	10	10	10	10	10			10	
10 <sup>-2</sup>	10	10	10	10	10	10			10	
10 <sup>-3</sup>	38		32	18	18	19			18	
10 <sup>-4</sup>	54			48	32	57			65	
10 <sup>-5</sup>	139								156	
10 <sup>-6</sup>										
10 <sup>-7</sup>										
10 <sup>-8</sup>										

### Leakage - ambient temperature / inner pressure = 40 bar

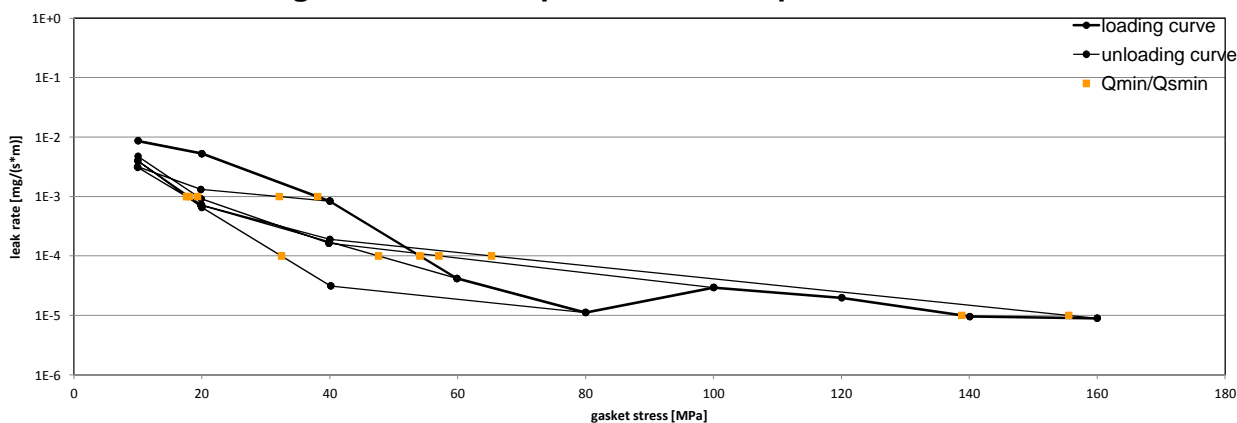

Note: the content of darkened cells was not determined respectively is unnecessary

Rev - No: 1

Creation date of this sheet:

24.05.2012

page 1 of 2



Center of Sealing Technologies, Bürgerkamp 3, 48565 Steinfurt, Germany

