


Company Address	W. L. Gore & Associates GmbH, Hermann-Oberth-Strasse 22, 85640 Putzbrunn, Germany	According to DIN EN 13555 2014-07
Gasket Type	GORE® Joint Sealant DF	
Sealing element dimensions [mm]	121 x 111 x 2	

L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 10 bar							
		Q _{Smin/L} [MPa]							
		Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa				
10 ⁰	10	10	10	10	10				
10 ⁻¹	18	10	10	10	12				
10 ⁻²	28		10	10	15				
10 ⁻³	38		27	14	18				
10 ⁻⁴	53			34	22				
10 ⁻⁵	76				62				
10 ⁻⁶									
10 ⁻⁷									
10 ⁻⁸									



Note: the content of darkened cells was not determined respectively is unnecessary Rev - No: 3 Creation date of this sheet: 2017-01-09

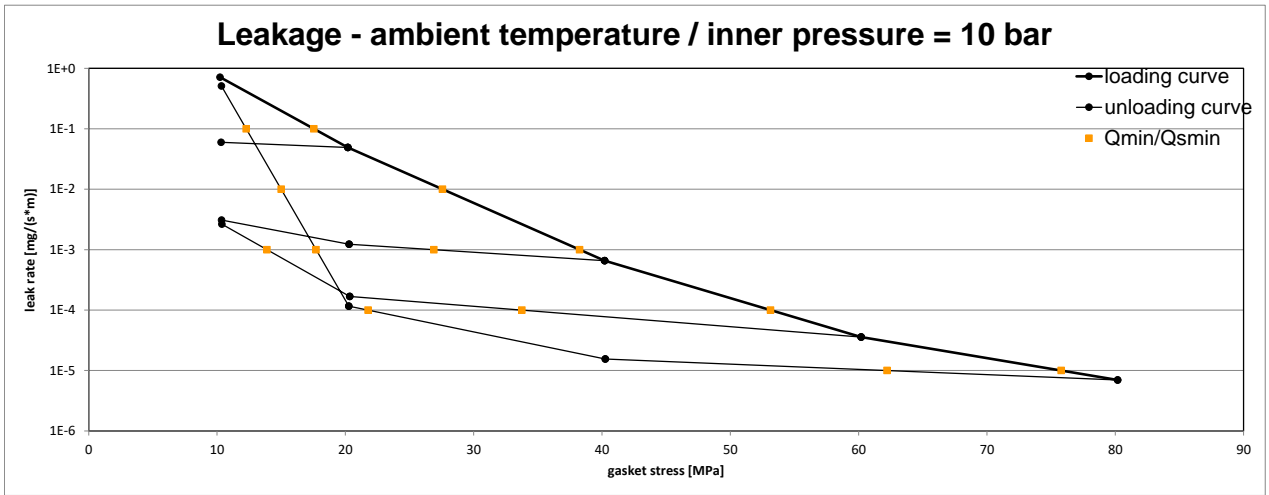