


Company Address	W. L. Gore & Associates GmbH, Hermann-Oberth-Strasse 22, 85640 Putzbrunn, Germany	According to <b>DIN EN 13555</b> 2014-07
Gasket Type	GORE® Joint Sealant DF	
Sealing element dimensions [mm]	121 x 111 x 2	

L [mg/(s*m)]	Q <sub>min,L</sub> [MPa]	Minimum stress to seal Q <sub>min,L</sub> (at assembly), Q <sub>Smin,L</sub> (after off-loading) for p = 10 bar							
		Q <sub>A</sub> = 20 MPa	Q <sub>A</sub> = 40 MPa	Q <sub>A</sub> = 60 MPa	Q <sub>A</sub> = 80 MPa				
10 <sup>0</sup>	10	10	10	10	10				
10 <sup>-1</sup>	18	10	10	10	12				
10 <sup>-2</sup>	28		10	10	15				
10 <sup>-3</sup>	38		27	14	18				
10 <sup>-4</sup>	53			34	22				
10 <sup>-5</sup>	76				62				



Note: the content of darkened cells was not determined respectively is unnecessary      Rev - No: 2      Creation date of this sheet: 2016-02-01

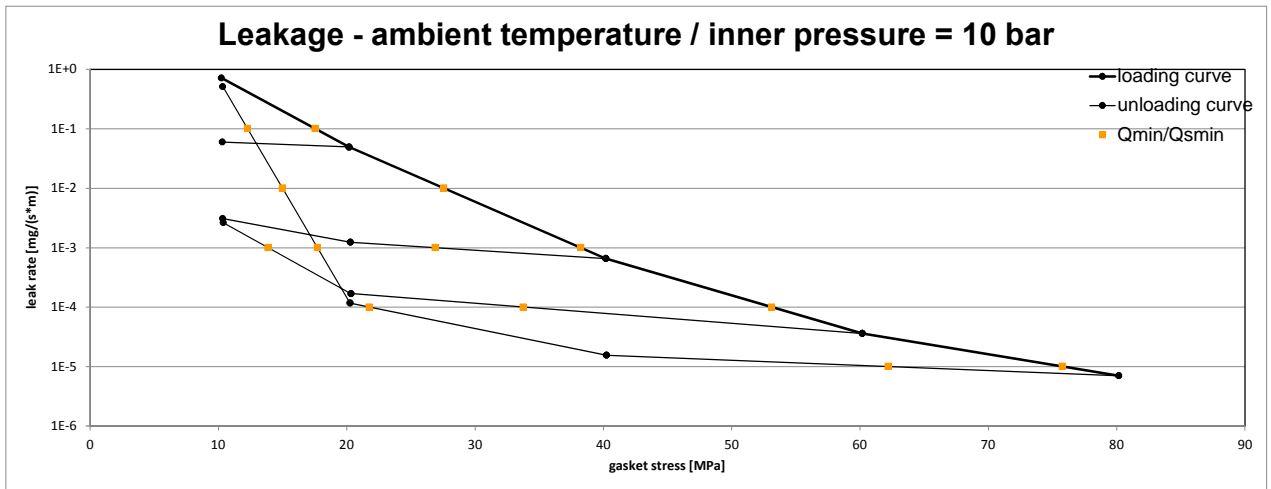