



Company Address	W.L. Gore & Associates GmbH, Hermann-Oberth-Str. 22, 85640 Putzbrunn, Germany
Gasket Type	GORE® GR Sheet Gasketing
Sealing element dimensions [mm]	92 x 49 x 3,2

L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 10 bar							
		Q _A = 10 MPa	Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa				
10 ⁰	5	5	5	5	5				
10 ⁻¹	11		5	5	5				
10 ⁻²	22			5	5				
10 ⁻³	32			5	5				
10 ⁻⁴	42				5				
10 ⁻⁵	58				5				
10 ⁻⁶									
10 ⁻⁷									
10 ⁻⁸									

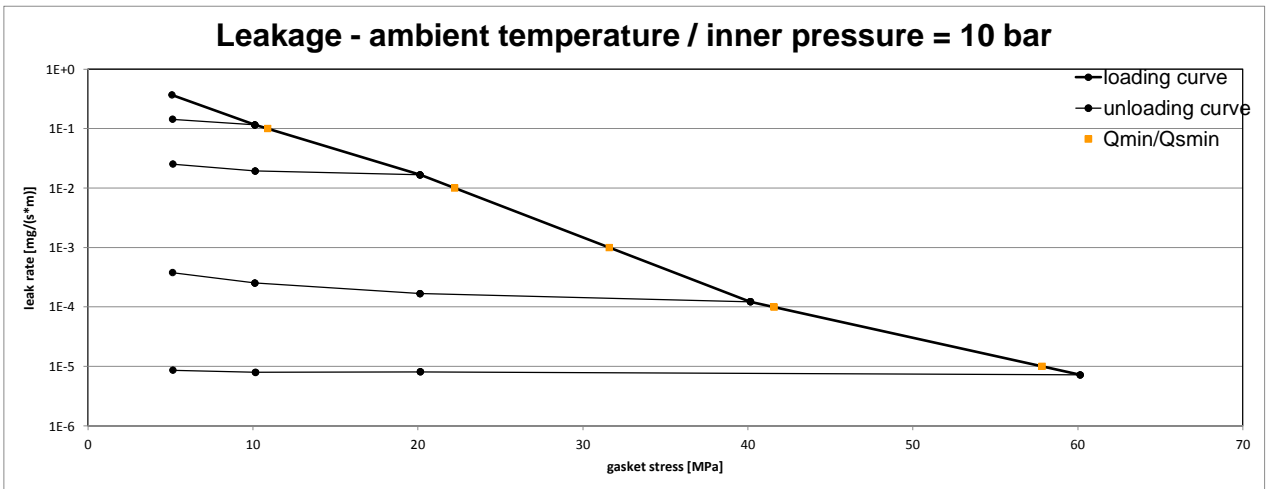

L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 20 bar							
		Q _A = 10 MPa	Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa				
10 ⁰	6	5	5	5	5				
10 ⁻¹	18		6	5	5				
10 ⁻²	30			5	5				
10 ⁻³	42				5				
10 ⁻⁴	53				5				
10 ⁻⁵									
10 ⁻⁶									
10 ⁻⁷									
10 ⁻⁸									

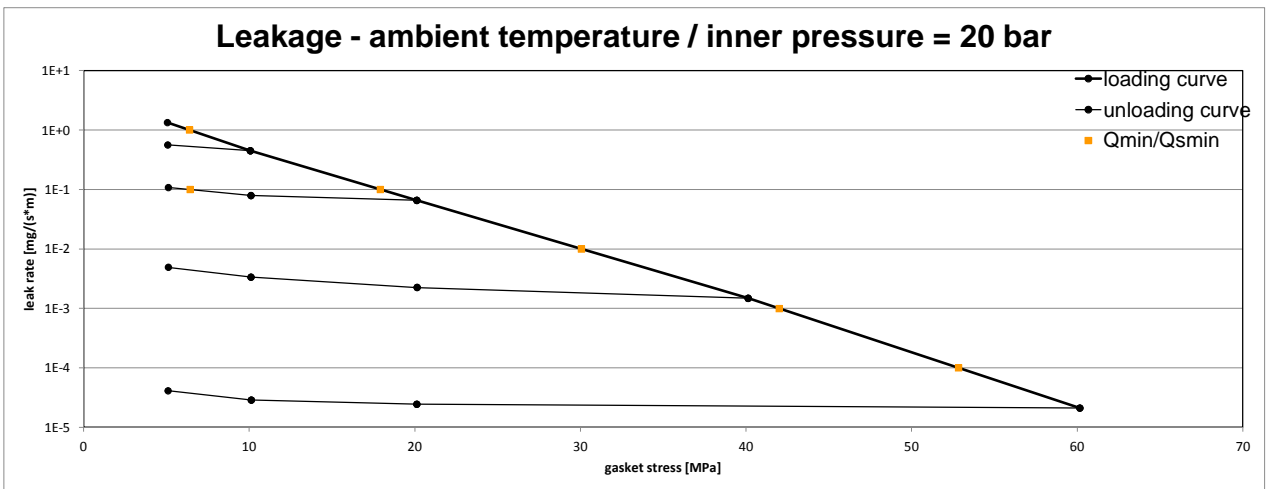

Note: the content of darkened cells was not determined respectively is unnecessary Rev - No: 1 Creation date of this sheet: 04.06.2012



Company Address	W.L. Gore & Associates GmbH, Hermann-Oberth-Str. 22, 85640 Putzbrunn, Germany
Gasket Type	GORE® GR Sheet Gasketing
Sealing element dimensions [mm]	92 x 49 x 3,2

L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 40 bar							
		Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa				
10 ⁰	10	9	9	9	9				
10 ⁻¹	21		9	9	9				
10 ⁻²	34		9	9	9				
10 ⁻³	46			9	9				
10 ⁻⁴	57			32	9				
10 ⁻⁵	79				73				
10 ⁻⁶									
10 ⁻⁷									
10 ⁻⁸									

