


Company Address	Leader Gasket of Slovakia s.r.o. , Psumovicka ulica 1026, 014 01 Bytca, Slovak republik
Gasket Type	Elastagraph 316SS corrugated with graphite
Sealing element dimensions [mm]	92 x 48 x 2.4

L [mg/(s*m)]	Q <sub>min/L</sub> [MPa]	Minimum stress to seal Q <sub>min/L</sub> (at assembly), Q <sub>Smin/L</sub> (after off-loading) for p = 40 bar									
		Q <sub>Smin/L</sub> [MPa]									
		Q <sub>A</sub> = 20 MPa	Q <sub>A</sub> = 30 MPa	Q <sub>A</sub> = 40 MPa	Q <sub>A</sub> = 60 MPa	Q <sub>A</sub> = 80 MPa	Q <sub>A</sub> = 100 MPa	Q <sub>A</sub> = 120 MPa	Q <sub>A</sub> = 140 MPa	Q <sub>A</sub> = 160 MPa	
10 <sup>-3</sup>	10	10	10	10	10	10	10			10	
10 <sup>-1</sup>	10	10	10	10	10	10	10			10	
10 <sup>-2</sup>	18	15	10	10	10	10	10			10	
10 <sup>-3</sup>	53				49	26	19			10	
10 <sup>-4</sup>	112									39	



Note: the content of darkened cells was not determined respectively is unnecessary      Rev - No: 1      Creation date of this sheet: 04.09.2013

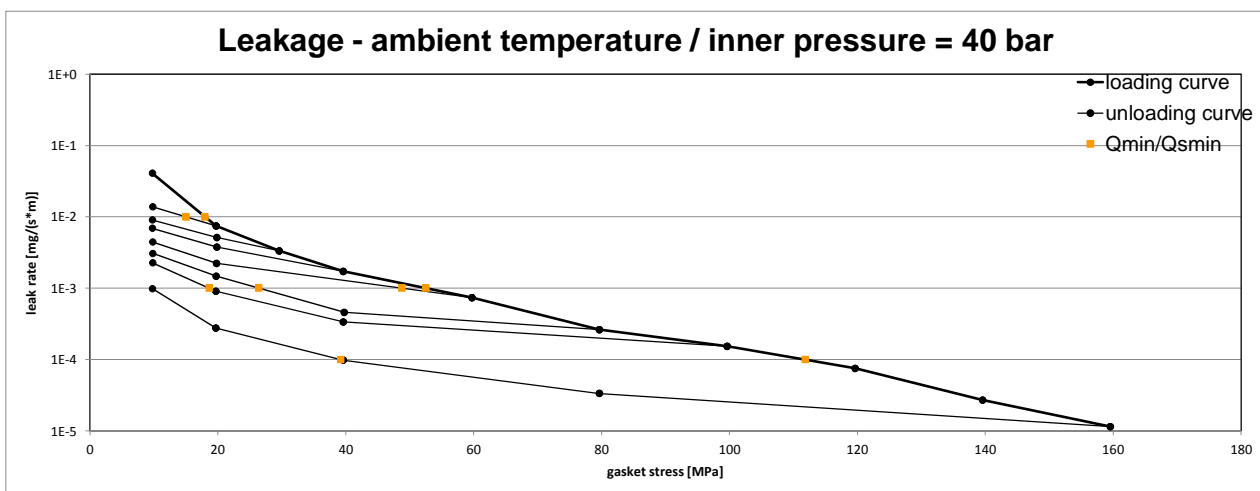