


Company Address	Groupe Eynard Robin, ZAC des Clochettes - 1, Allée de la Grange, 69191 ST-FONS Cedex, France	According to DIN EN 13555 2014-07
Gasket Type	KLINGER® top-chem3210	
Sealing element dimensions [mm]	92 x 49 x 2	

L [mg/(s*m)]	Q _{min,L} [MPa]	Minimum stress to seal Q _{min,L} (at assembly), Q _{Smin,L} (after off-loading) for p = 40 bar									
		Q _{Smin,L} [MPa]									
		Q _A = 20 MPa	Q _A = 30 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa	Q _A = 100 MPa				
10 ⁰	10	10	10	10	10	10	10				
10 ⁻¹	14	10	10	10	10	10	10				
10 ⁻²	20		10	10	10	10	10				
10 ⁻³	26		10	10	10	10	10				
10 ⁻⁴	34			10	10	10	10				
10 ⁻⁵	59				57	50	21				
10 ⁻⁶											
10 ⁻⁷											
10 ⁻⁸											



Note: the content of darkened cells was not determined respectively is unnecessary Rev - No: 2 Creation date of this sheet: 2015-05-27

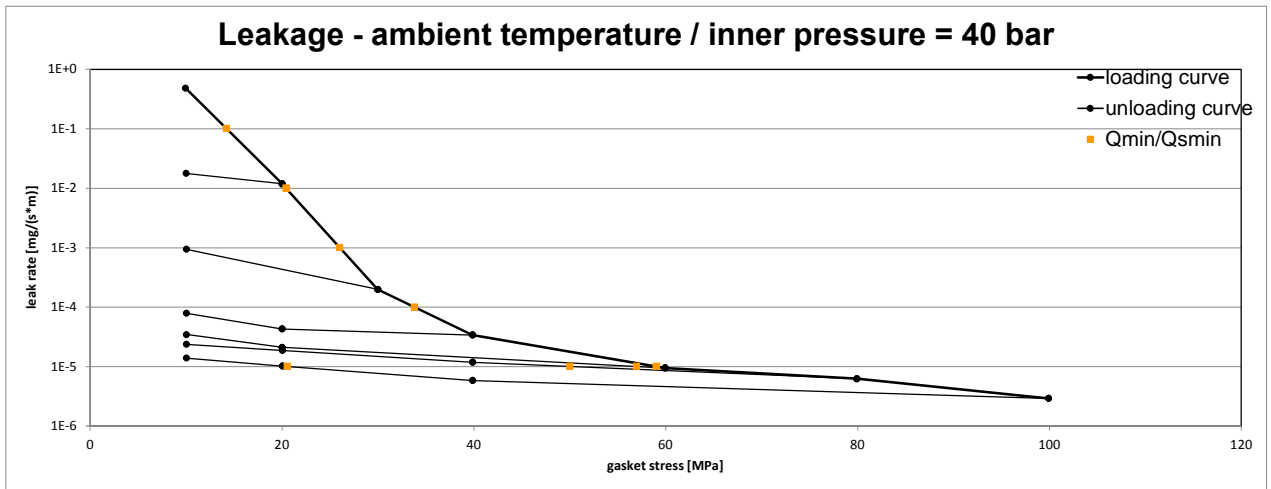