


Company Address	W.L. Gore & Associates GmbH, Hermann-Oberth-Str. 22, 85640 Putzbrunn, Germany
Gasket Type	GORE® Universal Pipe Gasket (Style 800)
Sealing element dimensions [mm]	92 x 49 x 6

L [mg/(s·m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 40 bar									
		Q _{Smin/L} [MPa]									
		Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa	Q _A = 100 MPa	Q _A = 120 MPa	Q _A = 140 MPa	Q _A = 160 MPa		
10 ⁰	10	10	10	10	10	10			10		
10 ⁻¹	10	10	10	10	10	10			10		
10 ⁻²	10	10	10	10	10	10			10		
10 ⁻³	30		25	10	10	10			10		
10 ⁻⁴	51			18	10	10			10		
10 ⁻⁵	71				23	12			10		
10 ⁻⁶	134								155		
10 ⁻⁷											
10 ⁻⁸											

Leakage - ambient temperature / inner pressure = 40 bar

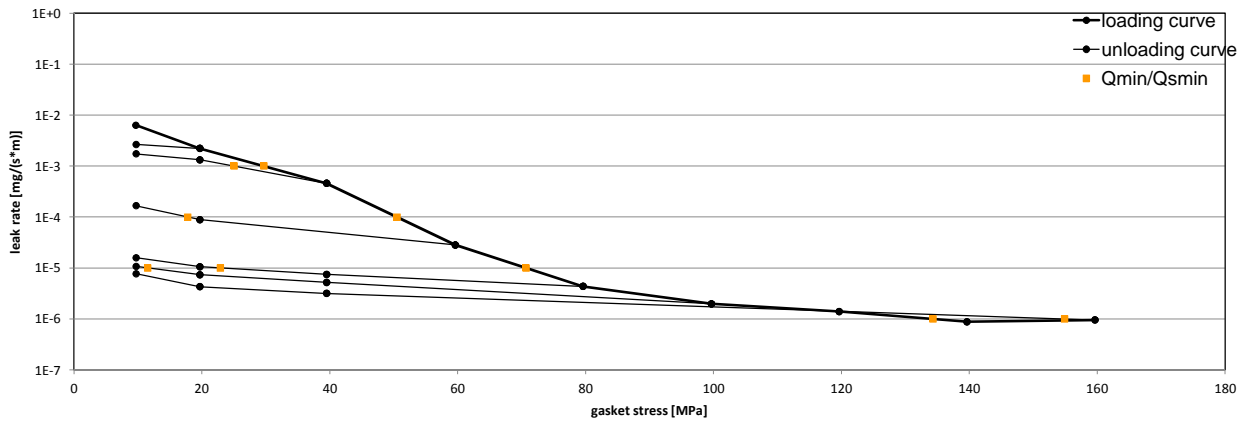

Note: the content of darkened cells was not determined respectively is unnecessary

Rev - No: 1

Creation date of this sheet:

04.06.2012

page 1 of 2



Center of Sealing Technologies, Bürgerkamp 3, 48565 Steinfurt, Germany

